



**MAGNETIC LIGHT FIXTURES
INSTALLATION INSTRUCTIONS**

INSTALLING THE LIGHT FIXTURE

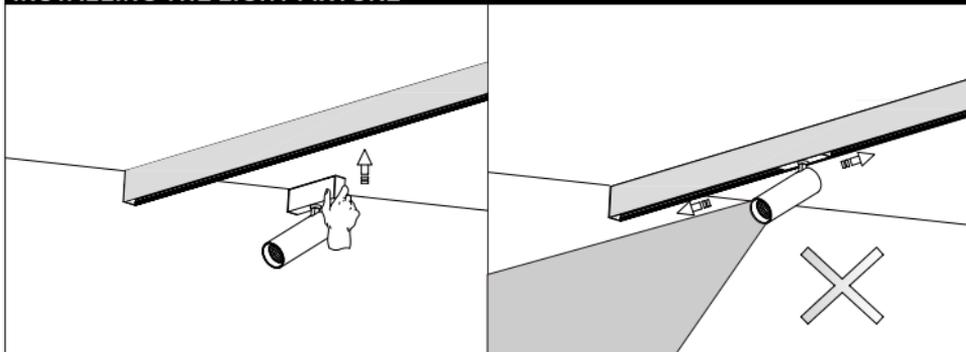


CORRECT STEPS FOR MOVING THE LIGHT FIXTURES

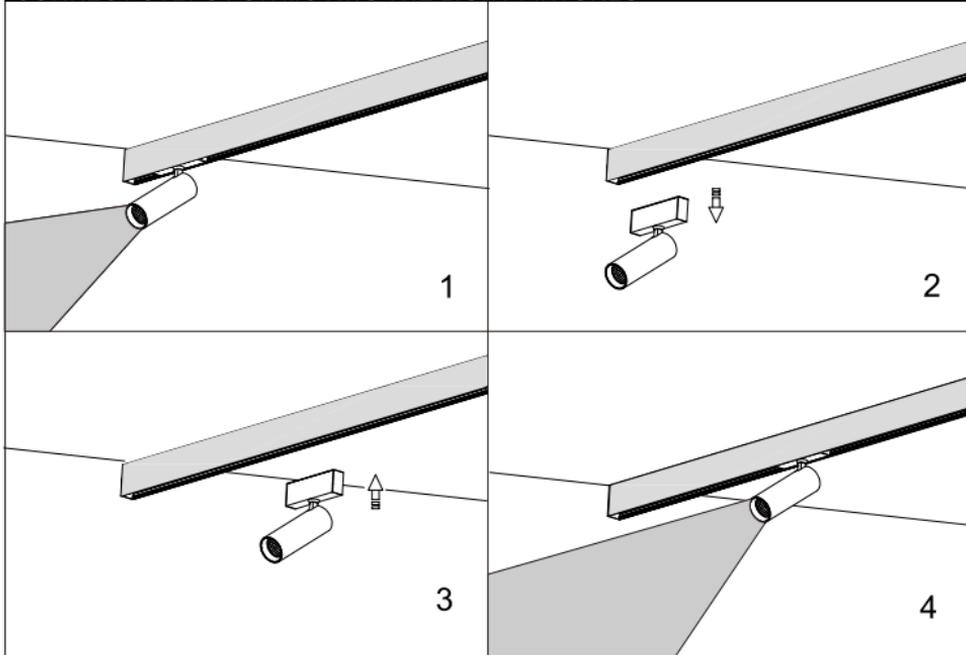


**PENDANT LIGHT FIXTURE- MSP305
FIXTURE ASSEMBLY INSTRUCTIONS**


1

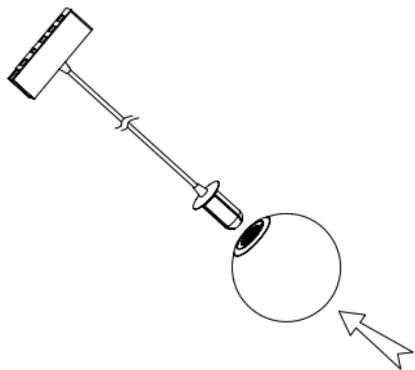

2

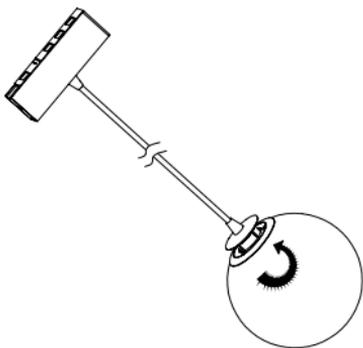

3

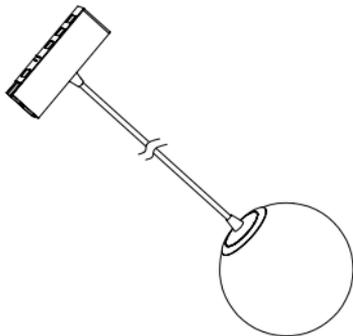


PENDANT LIGHT FIXTURE- MSP305


WIRE ADJUSTMENT INSTRUCTIONS

PARTS INCLUDED WITH FIXTURE:

- (a) PENDANT
- (b) END CAP
- (c) WIRE CONNECTOR
- (d) TOP COVER

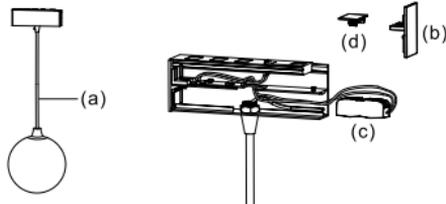


LOOSEN PLASTIC SET SCREW(e) AND GENTLY PULL CORD TO SHORTEN OR LENGTHEN THE PENDANT TO DESIRED HEIGHT. ONCE CORD IS AT DESIRED LENGTH, TIGHTEN PLASTIC SET SCREW TO HOLD CORD IN PLACE.

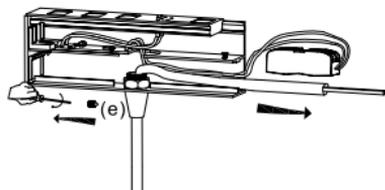

1


CUT THE CORD AND STRIP THE RED + BLACK WIRE ENDS



2


INSERT WIRES INTO CONNECTOR (c) BY OPENING LEVERS ON THE CONNECTOR, INSERTING WIRES, THEN CLOSING THE LEVERS.

NOTE: RED WIRE FROM FIXTURE SHOULD BE INSERTED DIRECTLY IN LINE WITH PRE-INSTALLED RED WIRE FROM MAGNET BOX; BLACK WIRE FROM FIXTURE SHOULD BE INSERTED DIRECTLY IN LINE WITH BLACK WIRE FROM MAGNET BOX

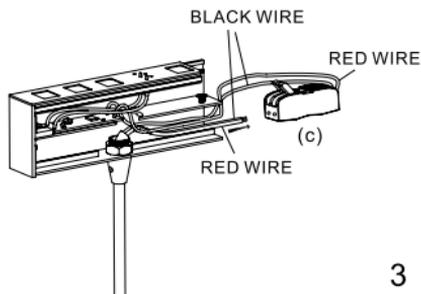


3

ONCE WIRE CONNECTORS ARE SECURED, CAREFULLY TUCK THE CONNECTOR (c) AND WIRES INTO THE OPENING OF THE MAGNET BOX



4

INSERT END CAP (b) UNDERNEATH SCREW IN MAGNET BOX AND TIGHTEN SCREW. ONCE SCREW HAS BEEN TIGHTENED, PLACE TOP COVER (d) OVER SCREW ACCESS OPENING AND PUSH DOWN TO SNAP INTO PLACE.



5

